

Description

Microcontroller operated flow meter for water (other liquids upon request). Particularly suited to volume flow measurements with simultaneous measurement of water temperature. Suitable for use with calorimetric monitoring heads.


FC01-LQ


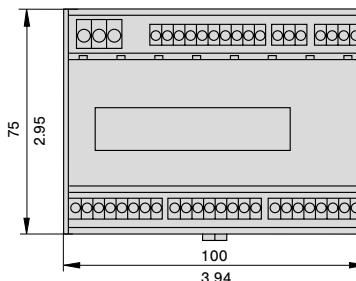
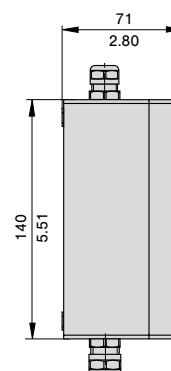
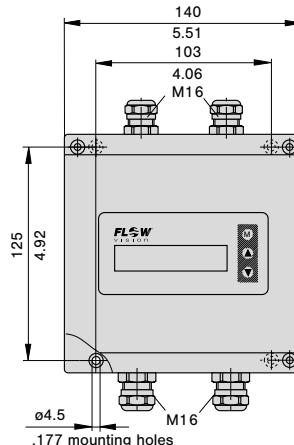

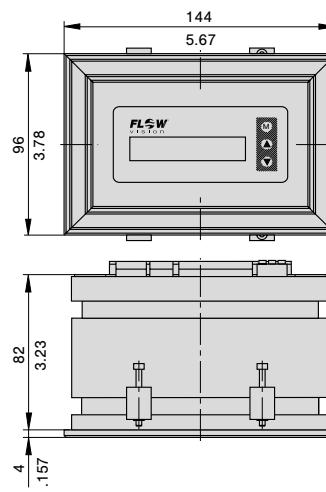
surface mounted

front panel mounted

Features

- Menu driven (keypads)
- LC display (2 x 16 digits) of:
 - current flow velocity, volume flow, temperature
 - bargraph status indication of limit contacts, actual flow rate/quantity or medium temperature;
 - directions for parameter assignment, configuration, diagnosis and error correction;
 - base value indication
- Two scalable analogue outputs
- Minimum/maximum memory of flow velocity and temperature
- Two freely selectable limit contacts
- pulse output calibrated to volume flow

Dimensions

FC01-LQ (rail-mounted housing)

FC01-FH-LQ (surface mounted housing)

FC01-ST-LQ (front panel mounted housing)


Ordering information

Type

FC01-LQ Flow Meter with software for water, rail-mounted
FC01-FH-LQ Flow Meter with software for water, surface mounted
FC01-ST-LQ Flow Meter with software for water, front panel mounted

Input voltage

U1 DC 19 ... 32 V

Signal outputs

R2 2 relay outputs (2 limit values)
T4 4 transistor outputs (2 limit values + 2 status, or 2 limit values + 1 status + 1 pulse output)

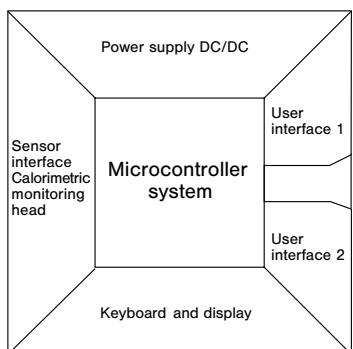
Analogue outputs

C1 0/4-20 mA (self-powered, physically isolated)

FC01-LQ - U1 R2 C1 ordering example

This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

TECHNICAL DATA				
Flow Meter FC01-LQ	with CSP monitoring head and-sensor adapter TP/ball valve BV	with CSF monitoring head		
General data				
Suitable for	water (other liquids upon request)			
Measuring functions	flow velocity, volume flow rate, temperature, totalised flow rate			
Display	2 x 16 digit LC display			
Parameter assignment, calibration by	keypads			
Temperature range (electronic control unit) in circulating air	+10 ... +50 °C/+50 ... +122 °F *)			
Electrical data				
Input voltage	DC 24 V (19 ... 32 V)			
Power consumption	DC 200 mA **)			
Analogue outputs	flow and temperature	0/4-20 mA or 0/2-10 V or 0/1-5 V		
Signal outputs	2 relay outputs (2 limit values)	2 SPDT contacts AC/DC 50 V / 1 A / 50 W		
	4 transistor outputs (2 limit values + 2 status oder 2 limit values +1 status +1 pulse output)	open collector outputs DC 36 V / 150 mA / 1,5 W		
Flow measurement				
Measuring range 0.05 ... 3 m/s / 0.164 ... 9.84 fps (display range 0 ... 4 m/s / 0 ... 13.1 fps)	in TP-01	0,02 - 2,2 (2,9) m³/h		
	in TP-02	0,04 - 3,4 (4,5) m³/h		
	in TP-03	0,05 - 5,3 (7,1) m³/h		
	in TP-04	0,10 - 8,7 (11,6) m³/h		
	in TP-05	0,14 - 13,6 (18,1) m³/h		
	in TP-06	0,20 - 21,2 (28,3) m³/h		
see table flow measurement range (next page)				
Accuracy ⁽⁵⁾	see failure diagram			
Repeatability (5 % MRFV - 100 % MRFV) ⁽²⁾	±1% of measured value ±0.5 % of measuring range final value			
Temperature drift of electronic control unit ⁽¹⁾	0.05 %/°C/measuring range final value 0.09 %/°F/measuring range final value			
Pressure error	±0.5 %/bar / ±0.5 %/14.5 psi of measured value			
Temperature measurement				
Measuring range	-40 ... +130 °C/-40 ... +266 °F			
Accuracy	±1 % of measuring range			
Mechanical data (electronic control unit)				
Degree of protection	rail-mounted	IP20		
	surface mounted	IP66		
	front panel mounted	IP65		
Materials	rail-mounted	acrylic vinyl/ styrene/ polycarbonate; heat sink aluminium		
	surface mounted	aluminium acryl		
	front panel mounted	aluminium black coated; display polyester foil		
Housing dimension (LxWxH)	see dimension diagram (previous page)			
Weight	rail-mounted	485 g/1.07 lb		
	surface mounted	1250 g/2.76 lb		
	front panel mounted	900 g/1.98 lb		
Cables	voltage supply	3x0,75 mm² (AWG 18)		
	to monitoring head	LifCYC 4x2x0,2 mm² (AWG 24)		
	analogue outputs	2 x LifCYC 2x0,25 mm² (AWG 24)		
	limit value output	2 x LifCYC 3x0,38 mm² (AWG 22)		
Max. cable length to monitoring head	200 m/656 ft			
*) With output C1 the max. admissible ambient temperature for the rail-mounted version is limited to +40 °C/+104 °F.				
**) With output C1, power consumption may be up to 300 mA ± 10 %.				
(1) Warm-up time to full accuracy: 15 minutes.				
(2) Of the set value, at constant temperature and flow conditions and stable thermal conductivity.				
(5) The accuracy values were determined under ideal conditions: - symmetrical complete flow profile - correct mounting in the pipe - inlets and outlets according to EN ISO 5167-1				
MRFV = measuring range final value				

Block diagram


Input voltage: DC 19 ... 32 V

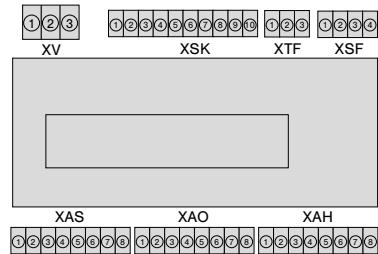
 Keyboard/display: keypads
LC display
2 x 16 digits

 User interface 1: relay outputs: 2 limit values
transistor outputs: 2 limit values +
1 error indication +
1 busy or quantity dependent pulse output (software selected)

 User interface 2: analogue outputs
current or voltage

 Controller system: signal processing
I/O - controlling
monitoring
parameter memory

Sensor interfaces: calorimetric monitoring head

Connection diagram

 Wire size: 0.14 mm² to 1.5 mm² single or finely stranded conductor
Stripping length: 6.5 mm
Clamping screw: M2 (nickel-plated brass)
Contact material: pre-tinned tin bronze

 XV: current supply
XSK: calorimetric monitoring head
XTF: keyboard release
XSF: not released for user
XAS: not released for user
XAO: analogue outputs
XAH: signal outputs

Flow measurement range (CSF-11.. monitoring head)

The flow measurement range is determined by the inside pipe diameter (see table). It can be calculated with the following equation:

$$Q = V_n \times A_r$$

 Q (m³/h) - flow quantity

 V_n (m/h) - average standard velocity

 A_r (m²) - inside pipe diameter

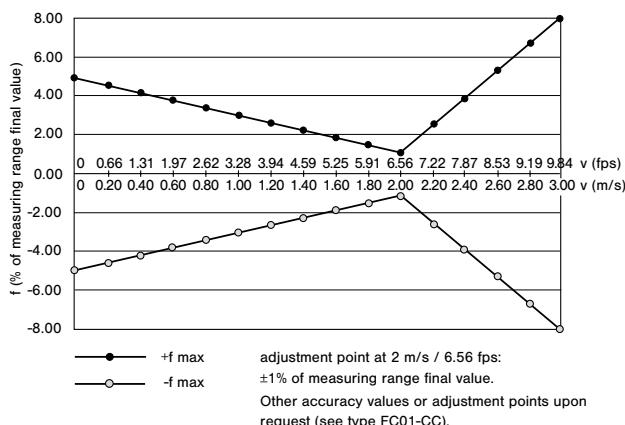
Setting range for inside pipe diameter:

50.0 mm ... 999.9 mm / 1.97 in. ... 39.4 in.

velocity measuring range:

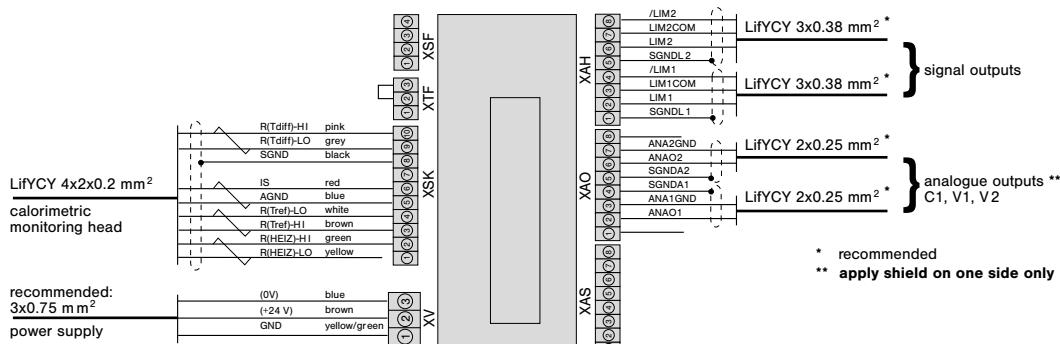
0 ... 3 m/s (0 ... 4 m/s) / 0 ... 9.84 fps (0 ... 13.1 fps)

inside pipe diameter D in mm	measuring range in m ³ /h	display range in m ³ /h
50	21	28
80	55	70
100	85	110
150	190	250
200	340	450
250	530	700
350	1040	1380
500	2120	2830

Failure diagram for water

A
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
B

Connection diagrams

A

FC01-LQ with relay outputs


1

2

3

4

5

6

7

8

9

10

11

12

13

14

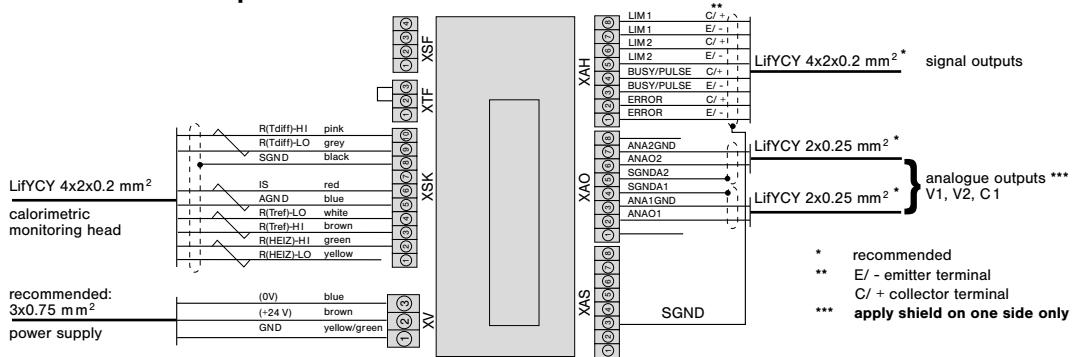
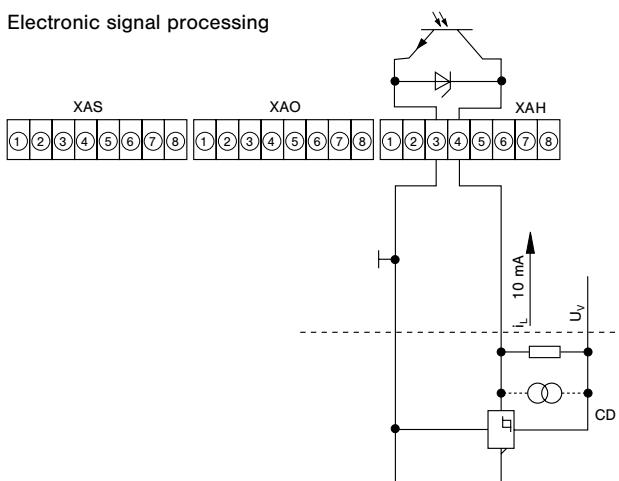
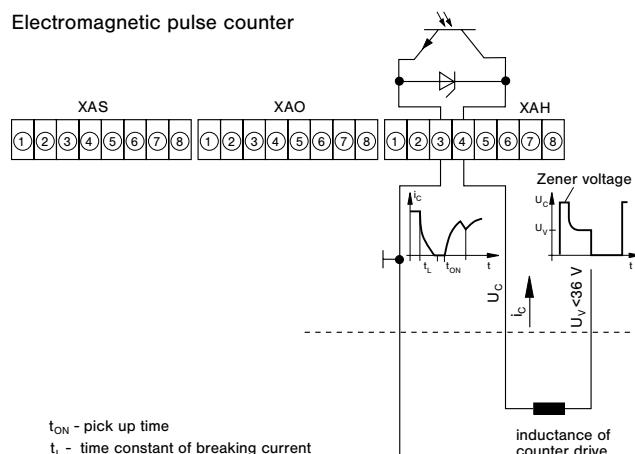
15

16

17

18

19

FC01-LQ with transistor outputs

FC01-LQ - Recommended connection of pulse output
Electronic signal processing

Electromagnetic pulse counter


All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.

B

Description

Sensor adapters TP and ball valves BV facilitate correct positioning and exchange of CSP monitoring heads, FC03, FC04 or FS10 in pipes with process connection DN 15 ... DN 50.

Ball valve BV enables pressure-free installation and removal of CSP monitoring heads and Flow Meters FC03, FC04 and Flow Monitor FS10 simply by closing the input and output pipe. The measuring points are suited to temporary measurements; after completion of the measuring cycle they can be closed by means of blanking plugs.

Sensor adapter TP-... / Ball valve BV-...



TP-...

BV-...

Features

- Correct positioning of sensor
- Ease of sensor replacement
- Measuring point can be closed if not used
- Sensor adapter available as screw-in or welding type
- Ball valve also serves as a shutoff valve (both input and output)

Ordering information

Type

BV ball valve with internal thread

Process connection/Nominal size

03	DN 25	G1	internal thread	length: 88 mm/3.46 in.
04	DN 32	G1 1/4	internal thread	length: 100 mm/3.94 in.
05	DN 40	G1 1/2	internal thread	length: 110 mm/4.33 in.
06	DN 50	G2	internal thread	length: 131 mm/5.16 in.

Material of the area exposed to medium

M3 nickel plated brass, Delrin seal

BV - 03 M3 ordering example

Ordering information

Type

TP Sensor adapter with internal thread

Process connection/Nominal size

01	DN 15	G 1/2	internal thread	length: 50 mm/1.97 in.
02	DN 20	G 3/4	internal thread	length: 64 mm/2.52 in.
03	DN 25	G1	internal thread	length: 78 mm/3.07 in.
04	DN 32	G1 1/4	internal thread	length: 94 mm/3.70 in.
05	DN 40	G1 1/2	internal thread	length: 110 mm/4.33 in.
06	DN 50	G2	internal thread	length: 138 mm/5.43 in.

Material of the area exposed to medium

M1	stainless steel 1.4571/AISI 316Ti	PN 315 bar/4570 psi
M3	brass (not TP-03..)	PN 25 bar/363 psi
M5	red brass (only TP-03..)	PN 16 bar/232 psi

TP - 01 M3 ordering example

Accessories

Description

Ref. No.

Blanking plug, brass, with O ring	0Z121Z000186
Union nut, brass	Y 306 901 01
Blanking plug, stainless steel 1.4571/AISI 316 Ti, with viton O ring	0Z121Z000187
Union nut, stainless steel	Y 306 901 03

Ordering information

Type

TP Sensor adapter with welding nipples

Process connection/Nominal size

01	DN 15	dia.d: 16 mm/.630 in.	length: 80 mm/3.15 in.
02	DN 20	dia.d: 20 mm/.787 in.	length: 70 mm/2.76 in.
03	DN 25	dia.d: 25 mm/.984 in.	length: 80 mm/3.15 in.
04	DN 32	dia.d: 32 mm/1.26 in.	length: 100 mm/3.94 in.
05	DN 40	dia.d: 40 mm/1.57 in.	length: 110 mm/4.33 in.
06	DN 50	dia.d: 50 mm/1.97 in.	length: 140 mm/5.51 in.

Material of the area exposed to medium

M1 stainless steel 1.4571/AISI 316Ti


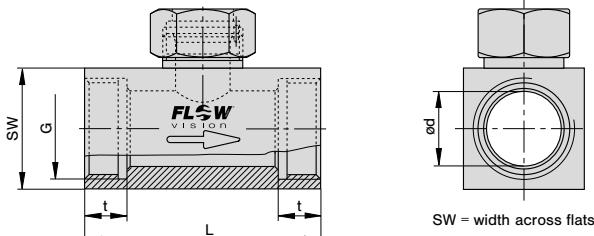
Process connection

SA welded connection

TP - 01 M1 - SA ordering example


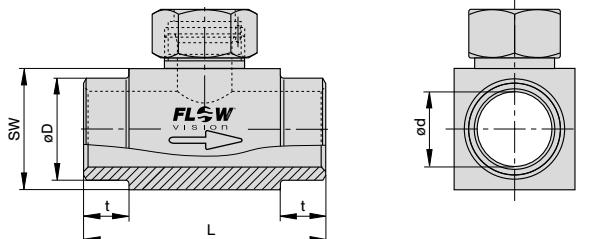
A**1****2****3****4****5****7****8****9****10****11****12****13****14****15****16****17****18****19****B**

Dimensions

A
TP-... Sensor adapter with internal thread


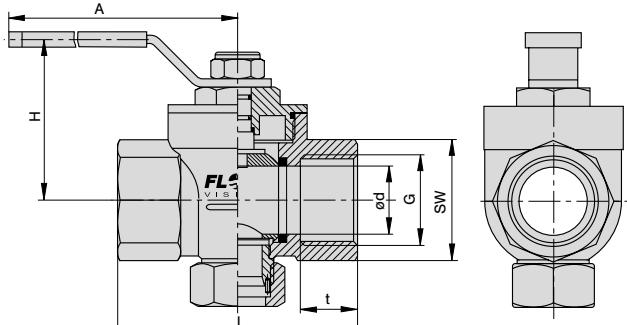
Material stainless steel (-M1): PN 315 bar / 4570 psi
 Material brass (-M3): PN 25 bar / 363 psi
 Material red brass (-M5): PN 16 bar / 232 psi

Type	DN	dia. d	G	t	L	SW		
	mm	in.	mm	in.	mm	in.	mm	in.
TP-01 ...	15	.591	16	.630	1/2"	11	.433	.50
TP-02 ...	20	.787	20	.787	3/4"	12	.472	.64
TP-03 ...	25	.984	25	.984	1"	14	.551	.78
TP-04 ...	32	1.26	32	1.26	1 1/4"	15	.591	.94
TP-05 ...	40	1.57	40	1.57	1 1/2"	15	.591	1.10
TP-06 ...	50	1.97	50	1.97	2"	19	.748	1.38

TP..M1-SA Sensor adapter with welding nipples


PN 315 bar / 4570 psi

Type	DN	dia. d	dia. D	t	L	SW		
	mm	in.	mm	in.	mm	in.	mm	in.
TP-01M1-S A	15	.591	16	.630	21.3 .839	15	.591	.80
TP-02M1-S A	20	.787	20	.787	26.9 1.06	15	.591	.70
TP-03M1-S A	25	.984	25	.984	33.7 1.33	15	.591	.80
TP-04M1-S A	32	1.26	32	1.26	42.4 1.67	15	.591	.100
TP-05M1-S A	40	1.57	40	1.57	48.3 1.90	15	.591	.110
TP-06M1-S A	50	1.97	50	1.97	60.3 2.37	15	.591	.140

BV...M3 Ball valve with internal thread


PN 25 bar / 363 psi

Type	DN	dia. d	G	t	L	SW	H	A
	mm	in.	mm	in.	mm	mm	mm	mm
BV-03M3	25	.984	25	.984	1"	21	.827	.88
BV-04M3	32	1.26	32	1.26	1 1/4"	24	.945	.100
BV-05M3	40	1.57	40	1.57	1 1/2"	24	.945	.110
BV-06M3	50	1.97	50	1.97	2"	28	1.10	.131

This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

B

Description

Calorimetric plug-in type monitoring head for sensor adapter TP/BV and flow meter FC01-LQ, suitable for use with liquids and pipe sizes up to DN 50.
Calibrated in water.

Features

- Ease of installation
- Small physical size
- Medium temperature range -40 ... +130 °C/-40 ... +266 °F
- Material: stainless steel 1.4571/AISI 316 Ti
- Sealing: Viton o-ring

Monitoring head CSP



CSP-11

Ordering information

Type No.														
CSP	plug-in type monitoring head with calorimetric sensors													
Process connection														
11 plug-in type														
Medium														
W water (standard)														
Material of areas exposed to medium														
M1 stainless steel 1.4571/AISI 316 Ti (standard)														
Length of shank/thread														
L05 18.2 mm/.717 in. (standard)														
Electrical connection														
E10 round connector with tinned contacts (plug and cable to order separately)														
Certification														
T0 without certificate (standard) *)														
Specification of medium														
xxx														
CSP	-	11	W	M1	L05	E10	T0 - ...	ordering example						

*) for detailed information please see section 0.

Technical data

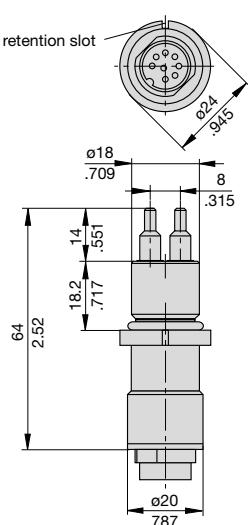
Type of head	plug-in type
Shank diameter	18 mm/.709 in.
Length of shank	18.2 mm/.717 in.
Length of sensor	14 mm/.551 in.
Suitable for	water (other liquids upon request)
Temperature range *) (of medium)	-40 ... +130 °C/-40 ... +266 °F
Temperature drift of monitoring head	± < 0.05 %/°C/measuring range ± < 0.09 %/°F/measuring range (T = +20 ... +80 °C/+68 ... +176 °F)
Measuring ranges	in TP-01 0.02 - 2.2 (2.9) m³/h in TP-02 0.04 - 3.4 (4.5) m³/h in TP-03 0.05 - 5.3 (7.1) m³/h in TP-04 0.1- 8.7 (11.6) m³/h in TP-05 0.14 - 13.6 (18.1) m³/h in TP-06 0.2 - 21.2 (28.3) m³/h
Pressure resistance ⁽¹⁾	100 bar/1450 psi
Degree of protection ⁽²⁾	IP67
Material	
housing:	stainless steel 1.4571/AISI 316 Ti laser welded
o-ring:	Viton
Cable to electronic control unit	LifYCY 4x2x0.2 mm² (AWG 24)

⁽¹⁾ Admissible operating pressure DIN 2401, measured at max. temperature (= max. medium temperature)

⁽²⁾ with mating connector

*) max. +85 °C/+185 °F in the connector area

Dimensions



This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

A

1

2

3

4

5

7

8

9

10

11

12

13

14

15

16

17

19

B

Cable types 15/18 with connectors

1
2
**Do + Ka type 15
Do + Ka type 18**
3
4
5
6
**Do + Ka type 15-ST
Do + Ka type 18-ST**
7
8
9
10
11
12
13
14
15
16
17
18
19
B
Technical data
Cable type 15 and 15-ST

Features: highly flexible, paired, fully shielded, electrical and thermal properties at +20 °C/+68 °F

Conductor resistance: 92 Ω/km

Insulation resistance: 20 MΩ x km

Operating voltage: 250 V

Withstand voltage: 500 V

Max. load: 2 A

Temperature range: -10 °C ... +80 °C/+14 °F ... +176 °F

(processing and operation)

-30 °C ... +80 °C/-22 °F ... +176 °F

(transport and storage)

Cable type 18 and 18-ST

Features: non-halogenous, highly flexible, cold- and heat resistant, paired, fully shielded, electrical and thermal properties at +20 °C/+68 °F

Conductor resistance: 80 Ω/km

Insulation resistance: 1200 MΩ x km

Operating voltage: 300 V

Withstand voltage: 1500 V

Max. load: 3 A

Temperature range: -50 °C ... +180 °C/-58 °F ... +356 °F

Ordering information
Type between calorimetric monitoring heads CSP and FC01-LQ, FC01-FH-LQ

Do + Ka type 15 PVC insulated cable, type LifYCY 4x2x0,2 mm² (AWG 24)
8-pole round connector + 10-pole clamping connector

Do + Ka type 18 silicone insulated cable, type 4x2x0,2mm² (AWG 24)
8-pole round connector + 10-pole clamping connector

Available cable lengths

...m 2 m, 3 m, 5 m, 8 m, 10 m, 15 m, 20 m, 25 m, 30 m,
40 m, 50 m, 60 m, 70 m, 80 m, 90 m, 100 m, 110 m,
120 m, 130 m, 140 m, 150 m, 160 m, 170 m, 180 m,
190 m, 200 m (up to max 656 ft)

Do + Ka type 15 - 2 m/6.56 ft ordering example

Type between calorimetric monitoring heads CSP and FC01-ST-LQ

Do + Ka type 15-ST PVC insulated cable, type LifYCY 4x2x0,2 mm² (AWG 24)
8-pole round connector + 10-pole clamping connector

Do + Ka type 18-ST silicone insulated cable, type 4x2x0,2mm² (AWG 24)
8-pole round connector + 10-pole clamping connector

Available cable lengths

...m 2 m, 3 m, 5 m, 8 m, 10 m, 15 m, 20 m, 25 m,
30 m, 40 m, 50 m, 60 m, 70 m, 80 m, 90 m, 100 m,
110 m, 120 m, 130 m, 140 m, 150 m, 160 m, 170 m,
180 m, 190 m, 200 m (up to max 656 ft)

Do + Ka type 15-ST - 2 m/6.56 ft ordering example


Description

Cable between Flow Meter FC01-xxx and calorimetric monitoring head type CSP.


- Connection to monitoring head by means of 8-pole round connector
- Connection to FC01-xxx by means of 10-pole clamping connector (XSK)

Accessories

8-pole round connector
(without cable, for individual wiring by customer)
OZ112Z003124



10-pole clamping connector for cable types 15 and 18
(without cable, for individual wiring by customer)
OZ112Z000167



10-pole clamping connector for cable types 15-ST and 18-ST
(without cable, for individual wiring by customer)
OZ112Z000205



This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

Standard warranty cover will be invalidated if the correct FlowVision monitoring head/control unit connecting cable is not used.

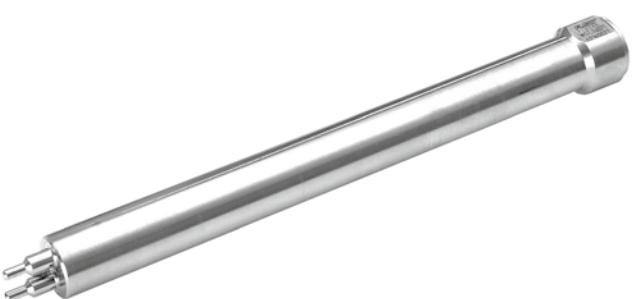
Description

Extended calorimetric monitoring head with variable immersion depth for Flow Meter FCO1-LQ, suitable for use in pipes with process connections DN 50 plus.
Calibrated in water.

Caution: Fix with locking set 01 (see accessories).

Features

- Temperature range: -40 ... +130 °C/-40 ... +266 °F
- Material: stainless steel 1.4571/AISI 316 Ti

Monitoring head CSF**CSF-11**

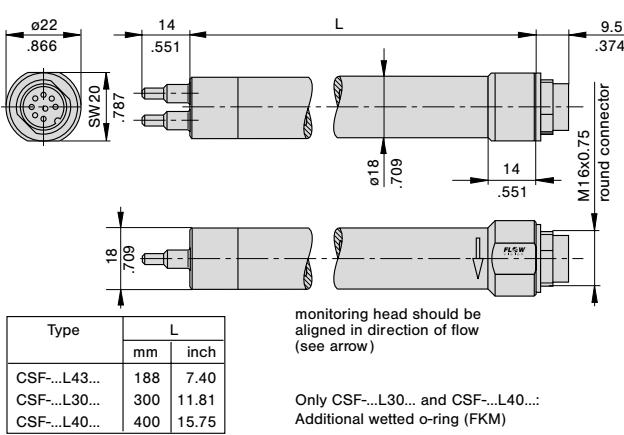
variable immersion depth

Ordering information

Type	Extended monitoring head with calorimetric sensors						
CSF	Monitoring head design						
11	Monitoring head with variable immersion depth						
Medium							
W water							
Material of areas exposed to medium							
M1 stainless steel 1.4571/AISI 316 Ti							
Process connection							
00 without flange; see accessories for cable gland **)							
Length of shank/thread							
L43 188 mm/7.40 in. (standard) other lengths upon request							
Electrical connection							
E10 round connector with tinned contacts (plug and cable to order separately)							
Certification							
T0 without certificate (standard *)							
Specification of medium							
xxx							
CSF - 11 W M1 00 L43 E10 T0 - ... ordering example							

*) for detailed information please see section 0.

**) see next page.

Dimensions

This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

Technical data

Type of head	push-in
Nominal shank dia.	18 mm/.709 in. without thread
Length of shank	188 mm/7.40 in.
Length of sensor	14 mm/.551 in.
Suitable for	water (other liquids upon request)
Temperature range *) (of medium)	-40 ... +130 °C/-40 ... +266 °F
Temperature drift of monitoring head	± < 0.05 %/°C/measuring range ± < 0.09 %/°F/measuring range (T = +20 ... +80 °C/+68 ... +176 °F)
Measuring range	depending on immersion depth; max. velocity 3 m/s / 9.84 fps
Pressure resistance ⁽¹⁾ (monitoring head)	100 bar/1450 psi
Pressure resistance ⁽¹⁾ (installation)	depending on connection (see accessories)
Degree of protection ⁽²⁾	IP67
Material	stainless steel 1.457/AISI 316 Ti
Cable to electronic unit	LifYCY 4x2x0.2 mm ² (AWG 24)

⁽¹⁾ Admissible operating pressure DIN 2401, measured at max. temperature (= max. medium temperature)

⁽²⁾ with mating connector

* max. +85 °C/+185 °F in the connector area

A

1

2

3

4

5

7

8

9

10

11

12

13

14

15

16

17

19

B

Cable types 15/18 with connectors

Do + Ka type 15
Do + Ka type 18

Do + Ka type 15-ST
Do + Ka type 18-ST

Technical data**Cable type 15 and 15-ST**

Features: highly flexible, paired, fully shielded, electrical and thermal properties at +20 °C/+68 °F

Conductor resistance: 92 Ω/km

Insulation resistance: 20 MΩ x km

Operating voltage: 250 V

Withstand voltage: 500 V

Max. load: 2 A

Temperature range: -10 °C ... +80 °C/+14 °F ... +176 °F (processing and operation)
-30 °C ... +80 °C/-22 °F ... +176 °F (transport and storage)

Cable type 18 and 18-ST

Features: non-halogenous, highly flexible, cold- and heat resistant, paired, fully shielded, electrical and thermal properties at +20 °C/+68 °F

Conductor resistance: 80 Ω/km

Insulation resistance: 1200 MΩ x km

Operating voltage: 300 V

Withstand voltage: 1500 V

Max. load: 3 A

Temperature range: -50 °C ... +180 °C/-58 °F ... +356 °F

Description

Cable between Flow Meter FC01-xxx and calorimetric monitoring head type CSF.

- Connection to monitoring head by means of 8-pole round connector
- Connection to FC01-xxx by means of 10-pole clamping connector (XSK)

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

B

Ordering information

Type between calorimetric monitoring heads **CSF** and **FC01-LQ, FC01-FH-LQ**

Do + Ka type 15 **PVC** insulated cable, type LifCY 4x2x0,2 mm² (AWG 24)
8-pole round connector + 10-pole clamping connector

Do + Ka type 18 **silicone** insulated cable, type 4x2x0,2mm² (AWG 24)
8-pole round connector + 10-pole clamping connector

Available cable lengths

...m 2 m, 3 m, 5 m, 8 m, 10 m, 15 m, 20 m, 25 m, 30 m,
40 m, 50 m, 60 m, 70 m, 80 m, 90 m, 100 m, 110 m,
120 m, 130 m, 140 m, 150 m, 160 m, 170 m, 180 m,
190 m, 200 m (up to max 656 ft)

Do + Ka type 15 - 2 m/6.56 ft ordering example

Type between calorimetric monitoring heads **CSF** and **FC01-ST-LQ**

Do + Ka type 15-ST **PVC** insulated cable, type LifCY 4x2x0,2 mm² (AWG 24)
8-pole round connector + 10-pole clamping connector

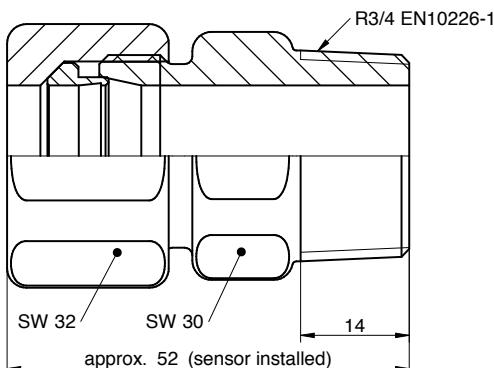
Do + Ka type 18-ST **silicone** insulated cable, type 4x2x0,2mm² (AWG 24)
8-pole round connector + 10-pole clamping connector

Available cable lengths

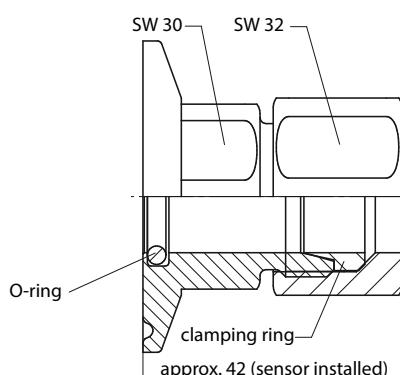
...m 2 m, 3 m, 5 m, 8 m, 10 m, 15 m, 20 m, 25 m,
30 m, 40 m, 50 m, 60 m, 70 m, 80 m, 90 m, 100 m,
110 m, 120 m, 130 m, 140 m, 150 m, 160 m, 170 m,
180 m, 190 m, 200 m (up to max 656 ft)

Do + Ka type 15-ST - 2 m/6.56 ft ordering example

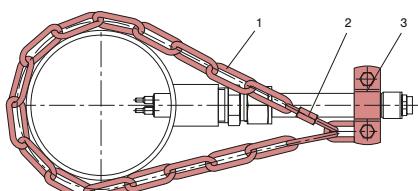
Compression fitting



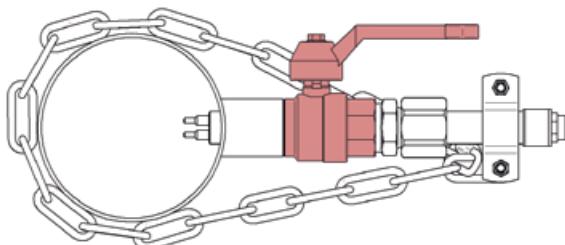
Hygiene flange



Locking set



Ball valve for installation under pressure



Description and ordering information

Compression fitting for push-in sensors with R3/4 thread

Compression fitting for push-in sensors

EEF Compression fitting

Process connection

04 Thread R3/4

Material double nipple and cap nut

M1 Stainless steel 1.4571

M2 Hastelloy C4 2.4610

Material clamping ring

CR1 Stainless steel 1.4571 PN 25 bar abs.

CR2 PTFE PN 5 bar abs.

CR3 Hastelloy C4 2.4610 PN 25 bar abs.

EEF - 04 - M1 - CR1 ordering example

Description and ordering information

Hygiene flange for push-in sensors with front-flush o-ring with FDA approval

Hygiene flange for push-in sensors

HEF Hygiene flange

Process connection

TF1 Triclamp DIN 32676

Material flange and cap nut

M1 Stainless steel 1.4571

M2 Hastelloy C4 2.4610

O-ring

R1 VMQ (Silicone) blue FDA (standard)

R2 VMQ (Silicone) white FDA

Material clamping ring

CR1 Stainless steel 1.4571 PN 25 bar abs.

CR2 PTFE PN 5 bar abs.

CR3 Hastelloy C4 2.4610 PN 25 bar abs.

HEF - TF1 - M1 - R1 - CR1 ordering example

Description and ordering information

Locking set for push-in sensors.

1 Chain 4 x 32 DIN 5685 (approx. 1 m)

2 Catch for chain NG 5

3 Clip with screw and nuts DN15 to DIN 11850

Ordering no.: 0Z122Z000204

Description and ordering information

Material (body, ball):

Brass nickel plated

Material (ball seal):

PTFE

Length:

65 mm

Outside thread:

G3/4“, L = 13 mm

Inside thread:

G3/4“, L = 15 mm

Fluid temperature:

-20...120 °C

Ambient temperature:

0...80 °C

Pressure:

PN 25 bar (up to 80 °C)

Ordering number: BV-02M3-PI

Material (body, ball):

Stainless steel 1.4408, 1.4401

Material (ball seal):

PTFE

Length:

78 mm

Outside thread:

R3/4“, L = 17 mm

Inside thread:

Rp3/4“, L = 13 mm

Fluid temperature:

-30...180 °C

Ambient temperature:

0...80 °C

Pressure:

PN 64 bar (up to 80 °C)

Ordering number: BV-02M15-PI

A

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18


19

B

Further accessories

A

8-pole round connector
(without cable, for individual wiring by customer)
0Z112Z003124




10-pole clamping connector for cable types 15 and 18
(without cable, for individual wiring by customer)
0Z112Z000167



10-pole clamping connector for cable types 15-ST and 18-ST
(without cable, for individual wiring by customer)
0Z112Z000205




PG16 nickel-plated brass
(standard)
0Z122Z000128



pressure resistant up to 2 bar/29.0 psi

NPT3/4" moulded, black
0Z122Z000131



pressure resistant up to 2 bar/29.0 psi

This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

Caution: Standard warranty cover will be invalidated if the correct FlowVision monitoring head/control unit connecting cable is not used.

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

B